

"The Standard of the Industry"



Mudmaster

Multi and Single Conductor III Wheeled Transporters

The Mudmaster is a camera transporter that's specifically designed with the necessary weight, power, high clearance, and all wheel drive for pipelines ranging from 24" to 200". The unit is designed to operate with 2000' of single-conductor cable or 1500' of multi-conductor cable and combines high ground clearance with pneumatic tires to provide the traction and camera stability that's required for operation under the most adverse pipeline conditions including high flow, deep mud, sand and large amounts of debris. Optional tandem wheels are available. The waterproof remote-operated camera lift can be inserted through a 19" diameter manhole with the camera in the lowest position to preclude the operator from confined space entry. This rugged all wheel drive robot can operate all CUES cameras, including OZ (Optical Zoom Pan and Tilt series) and Night Lite Pan and Tilt. Optional steerable units with remote or manual camera lifts are also available.

Operates with multi & single conductor systems!

Features & Benefits:

- Operates with CUES multi or single conductor systems
- Can operate on all truck-mounted and portable systems
- Operates with all CUES cameras
- Four or eight (tandem) wheels provide greater traction in all types of pipe, under all conditions
- Matched weight and power to maximize efficiency and capability
- Simple dual-wheel installation and captured hardware
- Remote-operated adjustable camera lift (optional) to position the camera for best available picture; stable center of gravity when the camera lift is extended
- Inspects 24" through 200" lines
- Rugged, durable and sealed to eliminate water intrusion
- 255 watt light system, variable, adjustable, 3 lamps (2-lamps for single-conductor III units-170 watts total)
- The unit has variable speed drive, power forward, power reverse, and freewheel capabilities
- Operates on 2000' (maximum) of single conductor cable; 1500' of multi conductor cable
- Fits through a manhole with an inside diameter of 19"
- Provide maximum traction on wet or dry surfaces through all types of sediment
- Optional full proportional steering control to traverse meandering pipe with 45° and 90° turns; minimizes transporter turnover in small diameter pipe
- Utilizes all-wheel drive in conjunction with a low center of gravity to traverse and steer through pipelines
- Longer wheel base to prevent accidental roll-over
- Dual motors to ensure adequate power for longer inspections
- High-clearance for operation in debris-filled pipes



Drive System


- Permanent drive self-cleaning drive sprockets with "Perfect Coat" steel chains and fiberglass chain guards
- Flush drains for easy cleaning
- (2) independent, electric, motor/transmission assemblies
- Each motor/transmission assembly includes a continuous rated 120 Volt DC electric motor rated at 1/8 horsepower
- Waterproof motor housings

Light Assembly (shown below with a SCIII single conductor unit)

- 2 each independent 85 watt long life light assemblies (170watts)
- Waterproof black anodized aluminum housing, replaceable plug-in bulb, defused lens and locking mount
- Wired to operate independently (in parallel) to preclude total light failure

Camera Lift (optional)

- Electronic, remote controlled, infinitely variable camera lift
- Provides a center-of-pipe view
- Prevents the need for an operator to enter the manhole to position and/or reposition the camera height
- Operated from the remote camera carrier controller

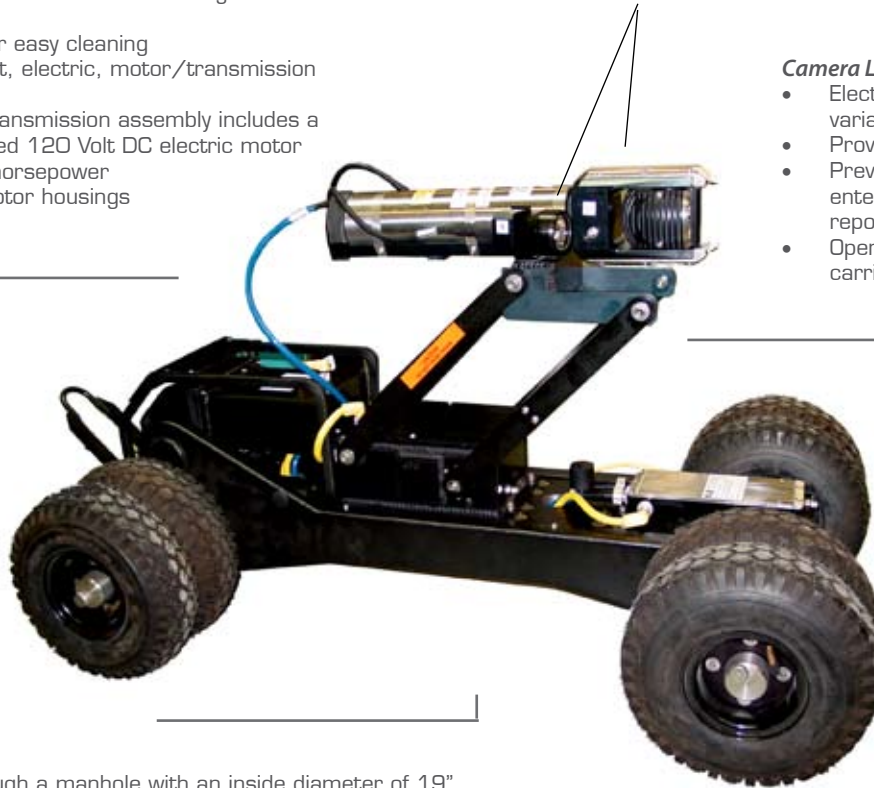

Transporter

- Fits through a manhole with an inside diameter of 19"
- Can complete 360 degree turns on open ground
- Retrieve the camera carrier in the free wheel mode by the video cable reel
- Includes one set of (8) 10.5" knobby tires with optional 12" chevron tread tires
- Incorporates dual four wheel drive for max traction on wet/dry surfaces through all types of sediment
- Wheelbase of 16" W x 41.5" L when using 10.5" diameter semi-pneumatic tires
- Includes variable speed drive, power forward, power reverse, and freewheel capabilities

OPTIONAL EQUIPMENT

- 425 watt light system, variable, adjustable with 5 lamps (multi-conductor only)
- Remote or manual camera lift to optically center the camera up to 60" diameter pipe
- Multiple wheel sizes to fit various pipe conditions; 12" diameter Chevron tires for maximum traction and ground clearance; optional liquid filled tires
- Optional full proportional steering control to traverse meandering pipe with 45 and 90 degree turns; minimizes transporter turnover in small diameter pipe